


# Bravo Agriculture

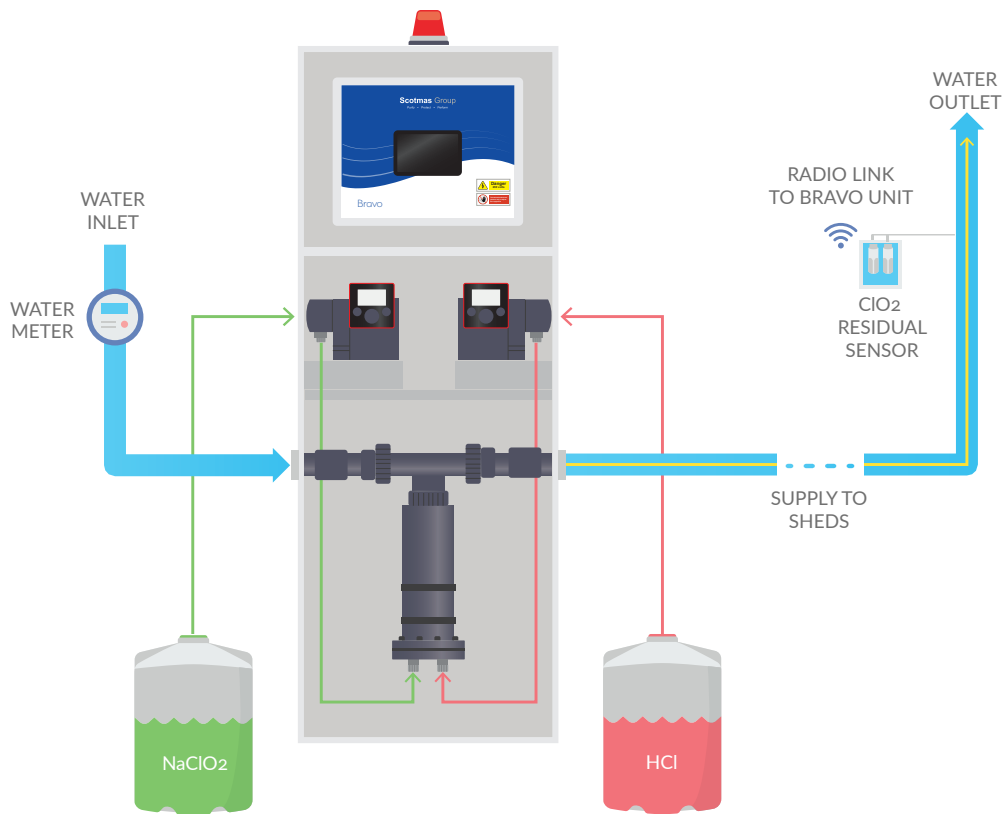

- Installation direct to your water line or in tank
- Water jacketed reactor maximises generator safety
- Full traceability and risk management
- Proactive management of water consumption within the flock
- Increased FCR outweighing cost of treatment
- Turnaround tank disinfection
- Pause mode for vaccinations
- Downstream monitoring of residuals within shed
- Full reporting of water consumption and biocide use via email and web access
- Full support and documentation from Scotmas, experts in ClO2 generation technology

Water Flows	Up to 160,000 l/hr water treated @0.5 mg/l ClO2
Dosing Control	Proportional dosing in accordance with digital or analog water meter input
Pumps	Digital dosing pumps certified to operate over a 15 year life cycle
Chlorine Dioxide Grade	Water Treatment Grade to BS EN 12671